


CONSTITUTION SPECIFICATIONS

- 1. CONSTRUCTION** The pole shall be constructed of a fiber-reinforced composite using structural glass and polyester resin.
- 2. COATING** A minimum 1-1/2 mil pigmented urethane UltraCoat™ coating shall be applied to the pole.
- 3. COLORS** The UltraCoat™ coating shall be pigmented with the following colors: a) Standard - Black, Green and Dark Bronze, b) Optional - Consult factory
- 4. FINISH** Standard finish is a smooth pigmented Ultra-Coat™ coating. Optional finishes include textured and exposed aggregate UltraCoat™ coatings.
- 5. BASE** The pole shall be available in Anchor base and **PLUS-BASE** styles. Anchor base styles are secured with four galvanized steel anchor bolts as specified. **PLUS-BASE** poles have two each standard 2-3/8" x 8" cable access holes.
- 6. STRENGTH** The pole shall withstand up to and including 100 mph winds with a 1.3 gust factor combined with an EPA of 3.5 sq. ft. Consult factory for higher EPA's and wind loads.
- 7. HANDHOLE** The handhole shall have minimum dimensions as shown in detail and located on the decorative base.
- 8. TENON** The tenon shall be 3" or 2-3/8" O.D. and constructed of cast aluminum.
- 9. HEIGHTS** Standard heights are as shown. Consult factory for heights not shown.
- 10. ANCHOR BASE** Anchor base poles shall contain a base plate constructed of composite material and shall be free of metal.
- 11. SHAFT DESCRIPTION** The fluted shafts shall be formed with 16 flutes. Smooth finish shafts shall be centrifugally cast with smooth tapered surface. Shaft shall not include any metal reinforcement.

CATALOG NUMBER LEGEND

| | | | |
|--------------------------------------|--|--|--|
| SERIES L Legacy Series | POLE INSTALLATION A Anchor Base B Plus-Base | FINISH S Smooth T Textured E Exposed Aggregate | TENON T238-2-3/8" T300-3" |
| LGOA14-S-6-T300-F* | | | |
| POLE STYLE GO Constitution | POLE LENGTH 10-20 | COLOR 2 DARK BRONZE 3 BLACK 6 GREEN 0 SPECIAL COLOR (SUPPLY COLOR CHIP WITH ORDER) | SHAFT F Fluted S Smooth |

*Add "-GFI" for Ground Fault Interruption

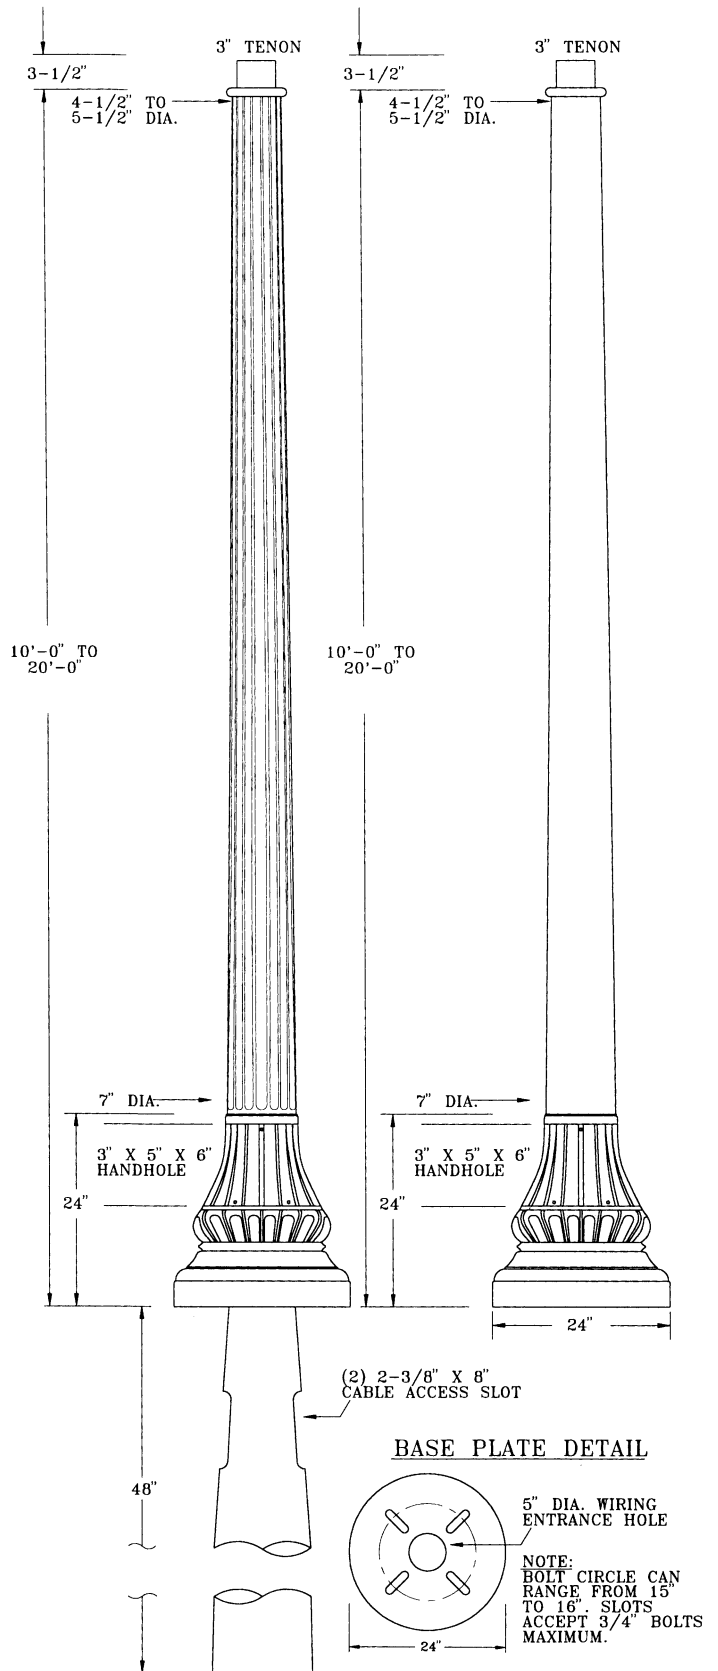

Corporate Headquarters
5600 Roswell Road • Suite E-350
Atlanta, GA 30342
Phone: 404-475-1205 • FAX: 404-475-1217

Manufacturing Facility
41 Wood Street • Estill, SC 29918
Phone: 803-625-3131 • FAX: 803-625-4722
www.compositematerialstech.com



Contact us or contact your Legacy Representative: