

DOMINION SPECIFICATIONS

1. CONSTRUCTION The pole shall be constructed of a fiber-reinforced composite using structural glass and polyester resin.

2. COATING A minimum 1-1/2 mil pigmented urethane UltraCoat™ coating shall be applied to the pole.

3. COLORS The UltraCoat™ coating shall be pigmented with the following colors: a) Standard - Black, Green and Dark Bronze, b) Optional - Consult factory

4. FINISH Standard finish is a smooth pigmented Ultra-Coat™ coating. Optional finishes include textured and exposed aggregate UltraCoat™ coatings.

5. BASE The pole shall be available in Anchor base and **PLUS-BASE** styles. Anchor base styles are secured with four galvanized steel anchor bolts as specified. **PLUS-BASE** poles have two each standard 2-3/8" x 8" cable access holes.

6. STRENGTH The pole shall withstand up to and including 100 mph winds with a 1.3 gust factor combined with an EPA of 3.5 sq. ft. Consult factory for higher EPA's and wind loads.

7. HANDHOLE The handhole shall have minimum dimensions as shown in detail and located on the decorative base.

8. TENON The tenon shall be 3" or 2-3/8" O.D. and constructed of cast aluminum.

9. HEIGHTS Standard heights are as shown. Consult factory for heights not shown.

10. ANCHOR BASE Anchor base poles shall contain a base plate constructed of composite material and shall be free of metal.

11. SHAFT DESCRIPTION The fluted shafts shall be formed with 16 flutes. Smooth finish shafts shall be centrifugally cast with smooth tapered surface. Shaft shall not include any metal reinforcement.


CATALOG NUMBER LEGEND

SERIES	POLE INSTALLATION	FINISH	TENON
L Legacy Series	A Anchor Base B Plus-Base	S Smooth T Textured E Exposed Aggregate	T238-2-3/8" T300-3"


LDA 12 - S - 6 - T 2 3 8 *

POLE STYLE	POLE LENGTH	COLOR
D Dominion	10-10'9" 12-12'0" 14-14'0"	2 DARK BRONZE 3 BLACK 6 GREEN 0 SPECIAL COLOR (SUPPLY COLOR CHIP WITH ORDER)

*Add "-GFI" for Ground Fault Interruption

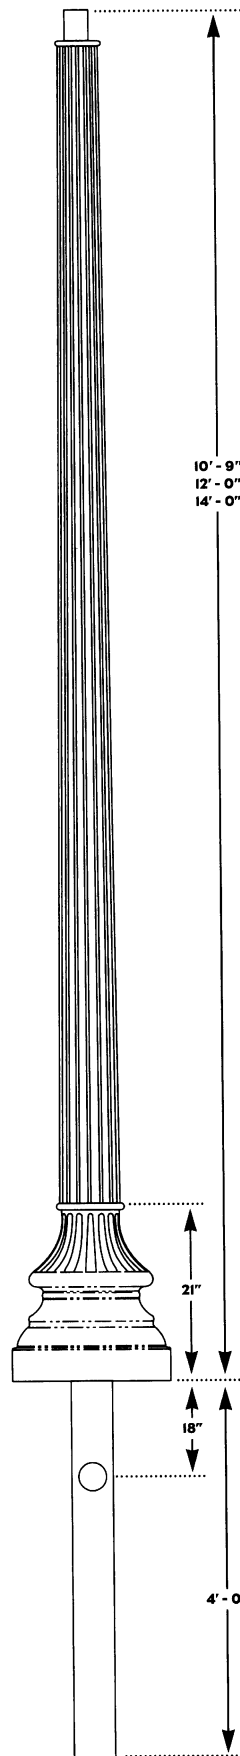


BASE PLATE DETAIL




NOTE: BOLT CIRCLE CAN RANGE FROM 12" TO 15". SLOTS ACCEPT 3/4" BOLTS MAXIMUM.

HANDHOLE DETAIL



NOTE: ANTI-ROTATIONAL DEVICE IS STANDARD ON ALL DIRECT EMBEDDED POLES.

Contact us or contact your Legacy Representative:



Corporate Headquarters
5600 Roswell Road • Suite E-350
Atlanta, GA 30342
Phone: 404-475-1205 • FAX: 404-475-1217

Manufacturing Facility
41 Wood Street • Estill, SC 29918
Phone: 803-625-3131 • FAX: 803-625-4722
www.compositematerialstech.com

